


Rod Seals

16

metric

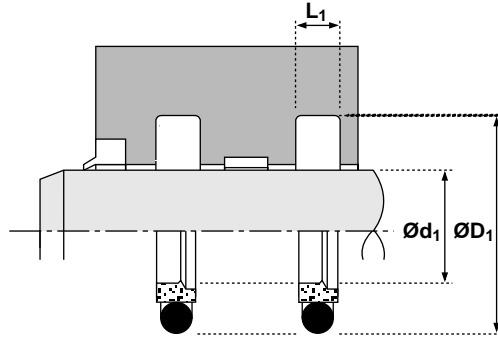


Ød ₁	TOL f ₉	ØD ₁	TOL H11	L ₁ +0.2-0	PART No.
12	-0.016 -0.059	19.5	+0.13 +0.00	3.2	86106_ _ ‡
14	-0.016 -0.059	21.5	+0.13 +0.00	3.2	86098_ _ ‡
15	-0.016 -0.059	22.5	+0.13 +0.00	3.2	86179_ _
16	-0.016 -0.059	23.5	+0.13 +0.00	3.2	66225_ _ ‡
18	-0.016 -0.059	25.5	+0.13 +0.00	3.2	66226_ _ ‡
20	-0.020 -0.072	31.0	+0.16 +0.00	4.2	65948_ _ ‡
22	-0.020 -0.072	33.0	+0.16 +0.00	4.2	65949_ _ ‡
25	-0.020 -0.072	36.0	+0.16 +0.00	4.2	65950_ _ ‡
28	-0.020 -0.072	39.0	+0.16 +0.00	4.2	66227_ _ ‡
30	-0.020 -0.072	41.0	+0.16 +0.00	4.2	65951_ _
32	-0.025 -0.087	43.0	+0.16 +0.00	4.2	65952_ _ ‡
35	-0.025 -0.087	46.0	+0.16 +0.00	4.2	66228_ _
36	-0.025 -0.087	47.0	+0.16 +0.00	4.2	65953_ _ ‡
40	-0.025 -0.087	55.5	+0.19 +0.00	6.3	65954_ _
43	-0.025 -0.087	58.5	+0.19 +0.00	6.3	86075_ _
45	-0.025 -0.087	60.5	+0.19 +0.00	6.3	65955_ _
50	-0.025 -0.087	65.5	+0.19 +0.00	6.3	65956_ _
56	-0.030 -0.104	71.5	+0.19 +0.00	6.3	65957_ _
60	-0.030 -0.104	75.5	+0.19 +0.00	6.3	65958_ _
63	-0.030 -0.104	78.5	+0.19 +0.00	6.3	65959_ _ ‡
65	-0.030 -0.104	80.5	+0.22 +0.00	6.3	65960_ _
70	-0.030 -0.104	85.5	+0.22 +0.00	6.3	65961_ _ ‡
75	-0.030 -0.104	90.5	+0.22 +0.00	6.3	65962_ _

Ød ₁	TOL f ₉	ØD ₁	TOL H11	L ₁ +0.2-0	PART No.
78	-0.030 -0.104	93.5	+0.22 +0.00	6.3	86112_ _
80	-0.030 -0.104	95.5	+0.22 +0.00	6.3	65963_ _ ‡
85	-0.036 -0.123	100.5	+0.22 +0.00	6.3	65964_ _
90	-0.036 -0.123	105.5	+0.22 +0.00	6.3	65965_ _ ‡
95	-0.036 -0.123	110.5	+0.22 +0.00	6.3	65966_ _
97	-0.036 -0.123	112.5	+0.22 +0.00	6.3	86113_ _
100	-0.036 -0.123	115.5	+0.22 +0.00	6.3	65967_ _ ‡
105	-0.036 -0.123	120.5	+0.25 +0.00	6.3	86478_ _
110	-0.036 -0.123	125.5	+0.25 +0.00	6.3	66229_ _ ‡
115	-0.036 -0.123	130.5	+0.25 +0.00	6.3	66391_ _
120	-0.043 -0.143	135.5	+0.25 +0.00	6.3	86099_ _
125	-0.043 -0.143	140.5	+0.25 +0.00	6.3	66392_ _ ‡
130	-0.043 -0.143	145.5	+0.25 +0.00	6.3	86102_ _
135	-0.043 -0.143	150.5	+0.25 +0.00	6.3	86103_ _
140	-0.043 -0.143	155.5	+0.25 +0.00	6.3	66393_ _ ‡
145	-0.043 -0.143	160.5	+0.25 +0.00	6.3	86156_ _
150	-0.043 -0.143	165.5	+0.25 +0.00	6.3	86157_ _
160	-0.043 -0.143	175.5	+0.25 +0.00	6.3	66394_ _ ‡
170	-0.043 -0.143	185.5	+0.25 +0.00	6.3	86083_ _
180	-0.043 -0.143	195.5	+0.29 +0.00	6.3	66395_ _ ‡
190	-0.050 -0.165	205.5	+0.29 +0.00	6.3	86074_ _
200	-0.050 -0.165	221.0	+0.29 +0.00	8.1	66396_ _ ‡
210	-0.050 -0.165	231.0	+0.29 +0.00	8.1	86094_ _

Rod Seals

16

metric

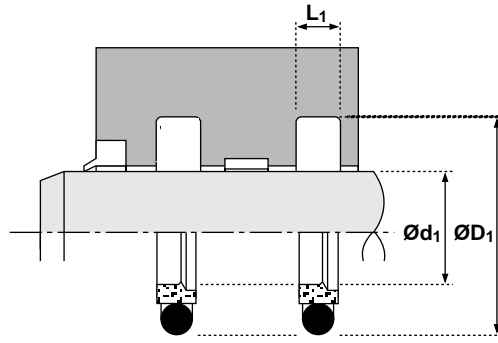

Ød ₁	TOL f9	ØD ₁	TOL H11	L ₁ +0.2-0	PART No.
220	-0.050 -0.165	241.0	+0.29 +0.00	8.1	66397_ _ ‡
240	-0.050 -0.165	261.0	+0.29 +0.00	8.1	86159_ _
250	-0.050 -0.165	271.0	+0.32 +0.00	8.1	66398_ _ ‡
270	-0.056 -0.186	294.5	+0.32 +0.00	8.1	86069_ _
280	-0.056 -0.186	304.5	+0.32 +0.00	8.1	66399_ _ ‡
290	-0.056 -0.186	314.5	+0.32 +0.00	8.1	86173_ _
300	-0.056 -0.186	324.5	+0.36 +0.00	8.1	66400_ _
320	-0.062 -0.211	344.5	+0.36 +0.00	8.1	86082_ _ ‡

Ød ₁	TOL f9	ØD ₁	TOL H11	L ₁ +0.2-0	PART No.
330	-0.062 -0.211	354.5	+0.36 +0.00	8.1	86196_ _
340	-0.062 -0.211	364.5	+0.36 +0.00	8.1	86197_ _
350	-0.062 -0.211	374.5	+0.36 +0.00	8.1	86198_ _
360	-0.062 -0.211	384.5	+0.36 +0.00	8.1	86199_ _ ‡
370	-0.062 -0.211	394.5	+0.36 +0.00	8.1	86200_ _
380	-0.062 -0.211	404.5	+0.40 +0.00	8.1	86201_ _
390	-0.062 -0.211	414.5	+0.40 +0.00	8.1	86202_ _
400	-0.062 -0.211	424.5	+0.40 +0.00	8.1	86203_ _